


PV Storage System Specifications

5K/5KWh

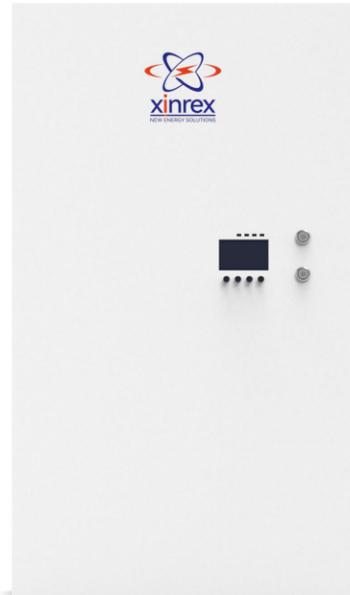

- Combines energy storage and inverter functionality in a single unit, reducing installation time and costs, making it especially suitable for residential and small commercial applications.
- Delivers 94% to 99.5% efficiency for batteries and inverters, ensuring high energy conversion rates and minimizing energy waste.
- Capable of handling up to 5000W of photovoltaic power, providing ample energy input for homes or businesses.
- Utilizes LFP (Lithium Iron Phosphate) batteries with a lifespan of up to $\geq 6,000$ cycles, ensuring long-term energy supply and stable storage performance.
- Equipped with WiFi connectivity, enabling real-time monitoring of system status and energy usage, allowing users to manage and track their power systems conveniently.

Model 5K/5KWh

Battery

Cell Materials	LiFePO4
Pack Method	1P16S
Nominal Capacity	102Ah
Nominal Voltage	51.2V
Energy	5222Wh
Communication Method	CAN
Charge Cut-off Voltage	58.4V
Discharge Cut-off Voltage	41.6V
Maximum Charging Current	100A
Maximum Discharge Current	100A
Charging Mode	Two-Stage/Three-Stage Charging/PV Charging
Operating Efficiency	98%
Cycle Life	$\geq 6,000$ Times
Internal impedance	$\leq 100\text{m}\Omega$
Ambient Temperature	$-10^{\circ}\text{C}\sim 50^{\circ}\text{C}$

PV

PV Charging Method PV	MPPT
PV Input Maximum Power PV	5000W
MPPT Operating Voltage MPPT	120~430Vdc
PV input Voltage Range PV	150V~500V

MPPT Operating Voltage MPPT	120Vdc~430Vdc
Starting Voltage	150Vdc
PV Maximum input Voltage PV	500Vdc
MPPT Quantity MPPT	1
Maximum Input Current	30A
Max Charging Current	100A

AC Input

Main Topology	L+N+PE
Nominal Voltage	Default 220V, 230/240VAC
Input Voltage Range	90~280V(Default APP); 170~280V(UPS)
Frequency Range	45~55Hz, Default
Power Factor	≥ 0.99

AC Output

Main Topology	L+N+PE
Output Voltage Waveform	Pure Sine Wave
Output Voltage	Default 220VM, 230/240VAC
Voltage Regulation	$\leq \pm 5\%$
Nominal Output Power	5000W
Power Factor	1
Frequency Range	Line Mode: Synchronized range, Battery Mode: 50/60Hz $\pm 0.1\%$
Harmonic Distortion	$\leq 3\%$ (Linear Load); $\leq 5\%$ (Non-linear Load PF=0.7)
Transfer Time	APP: Line Mode to Battery Mode 10ms(Typical) UPS: Line Mode to Battery Mode 10ms(Typical)
Overlord Capacity	1min@102%~110% Load; 10s@110%~130% Load; 3s@130%~150% Load; 0.2s@>150% Loa
Maximum Charging Current of AC Power	80A
Bypass Current	40A
Switching Time	<10ms

Efficiency

Battery Mode(Peak Efficiency)	94%
MPPT Tracking Efficiency (Peak Efficiency)	99.5%
Line Mode	>99.5%@5Kva (Full R load, without battery connect;Efficiency VS load curve with different input Voltage.
Battery Mode	>91.5% (Full R load;Efficiency VS load curve with different input Voltage.
Standby Power	< 60W (No-load mode, battery disconnected)

General parameters

IP Protection Level	IP21
Ambient Temperature	$-20^{\circ}\text{C}\sim 50^{\circ}\text{C}$
Operating Temperature Range	$-20^{\circ}\text{C}\sim 60^{\circ}\text{C}$
Ambient Humidity	5~95%(No condensation)
Display Mode	LCD
Warranty	5 years for battery cells and 2 years for inverter boards
Operating Altitude	<2000m
Cooling	Intelligent air cooling
Size(W*H*Dmm)	800*455*140mm
Weight	54.5kg
Noise	<60dB